Houston Radar DIN-400-0002 Quick Start

Revision 1.0 June 30, 2026

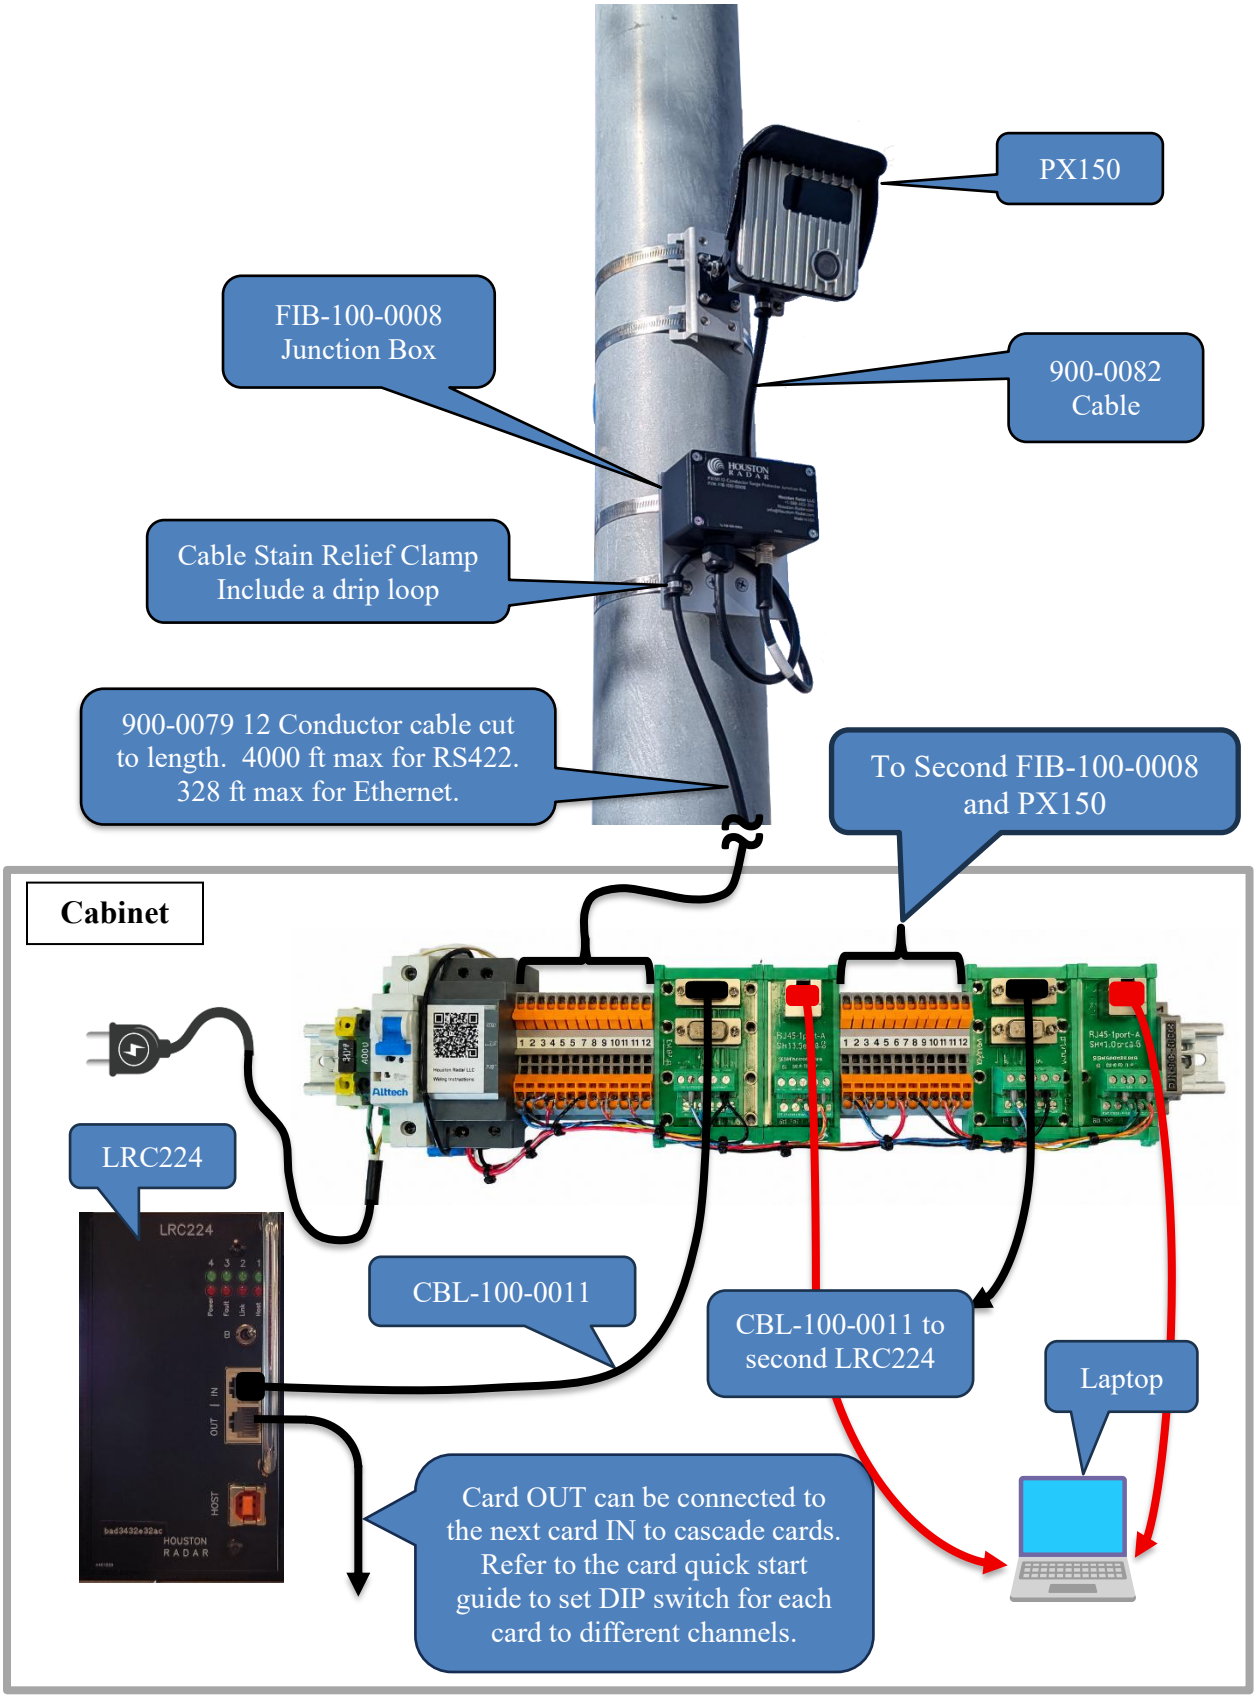

Houston Radar FIB-400-0002 Quick Start

Figure 1

Quickon Terminal Wiring Guide

#	Color		RS422 Mode	RS232 Mode	RS485 Mode
1	Brown		TX+	RTS	Data+
2	White/Brown		TX-	TXD	Data-
3	Blue		RX+	RXD	
4	White/Blue		RX-	CTS	
5	Red	+VCC			
6	Yellow	Reserved			
7	Black	DC Return	GND	GND	GND
8	Grey	Reserved			
9	White/Orange	Ethernet TX+			
10	Orange	Ethernet TX-			
11	White/Green	Ethernet RX+			
12	Green	Ethernet RX-			

There is no need to strip the wires. Just insert the wire into the terminal block and close the terminal point with a screwdriver, using the screwdriver as a lever.

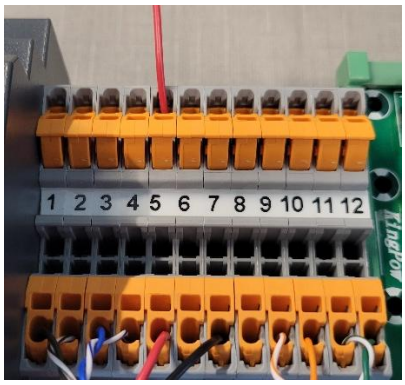

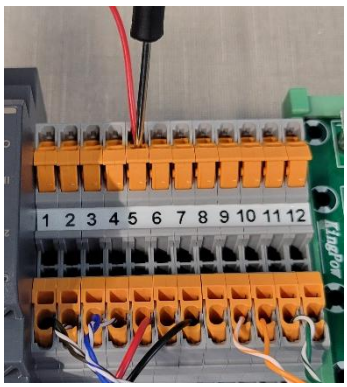

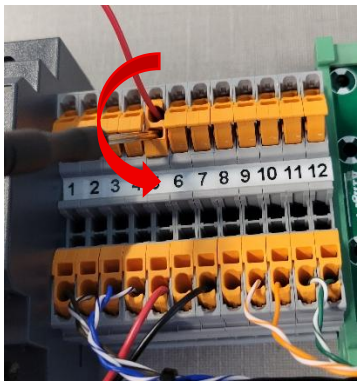

Quickon terminal video link.

https://www.youtube.com/watch?v=CvqKz_Jn7

Installation Video Link

https://houston-radar.com/px150-din-400-0002-video

Specifications:

Input voltage (V): 85 – 264 VAC
Working temperature: - 25 to +55 °C
Dimensions: 18” (width) x 5” (height) x 4” (depth)