Houston Radar DIN-200-0004 Quick Start

Revision 1.1 September 29, 2026

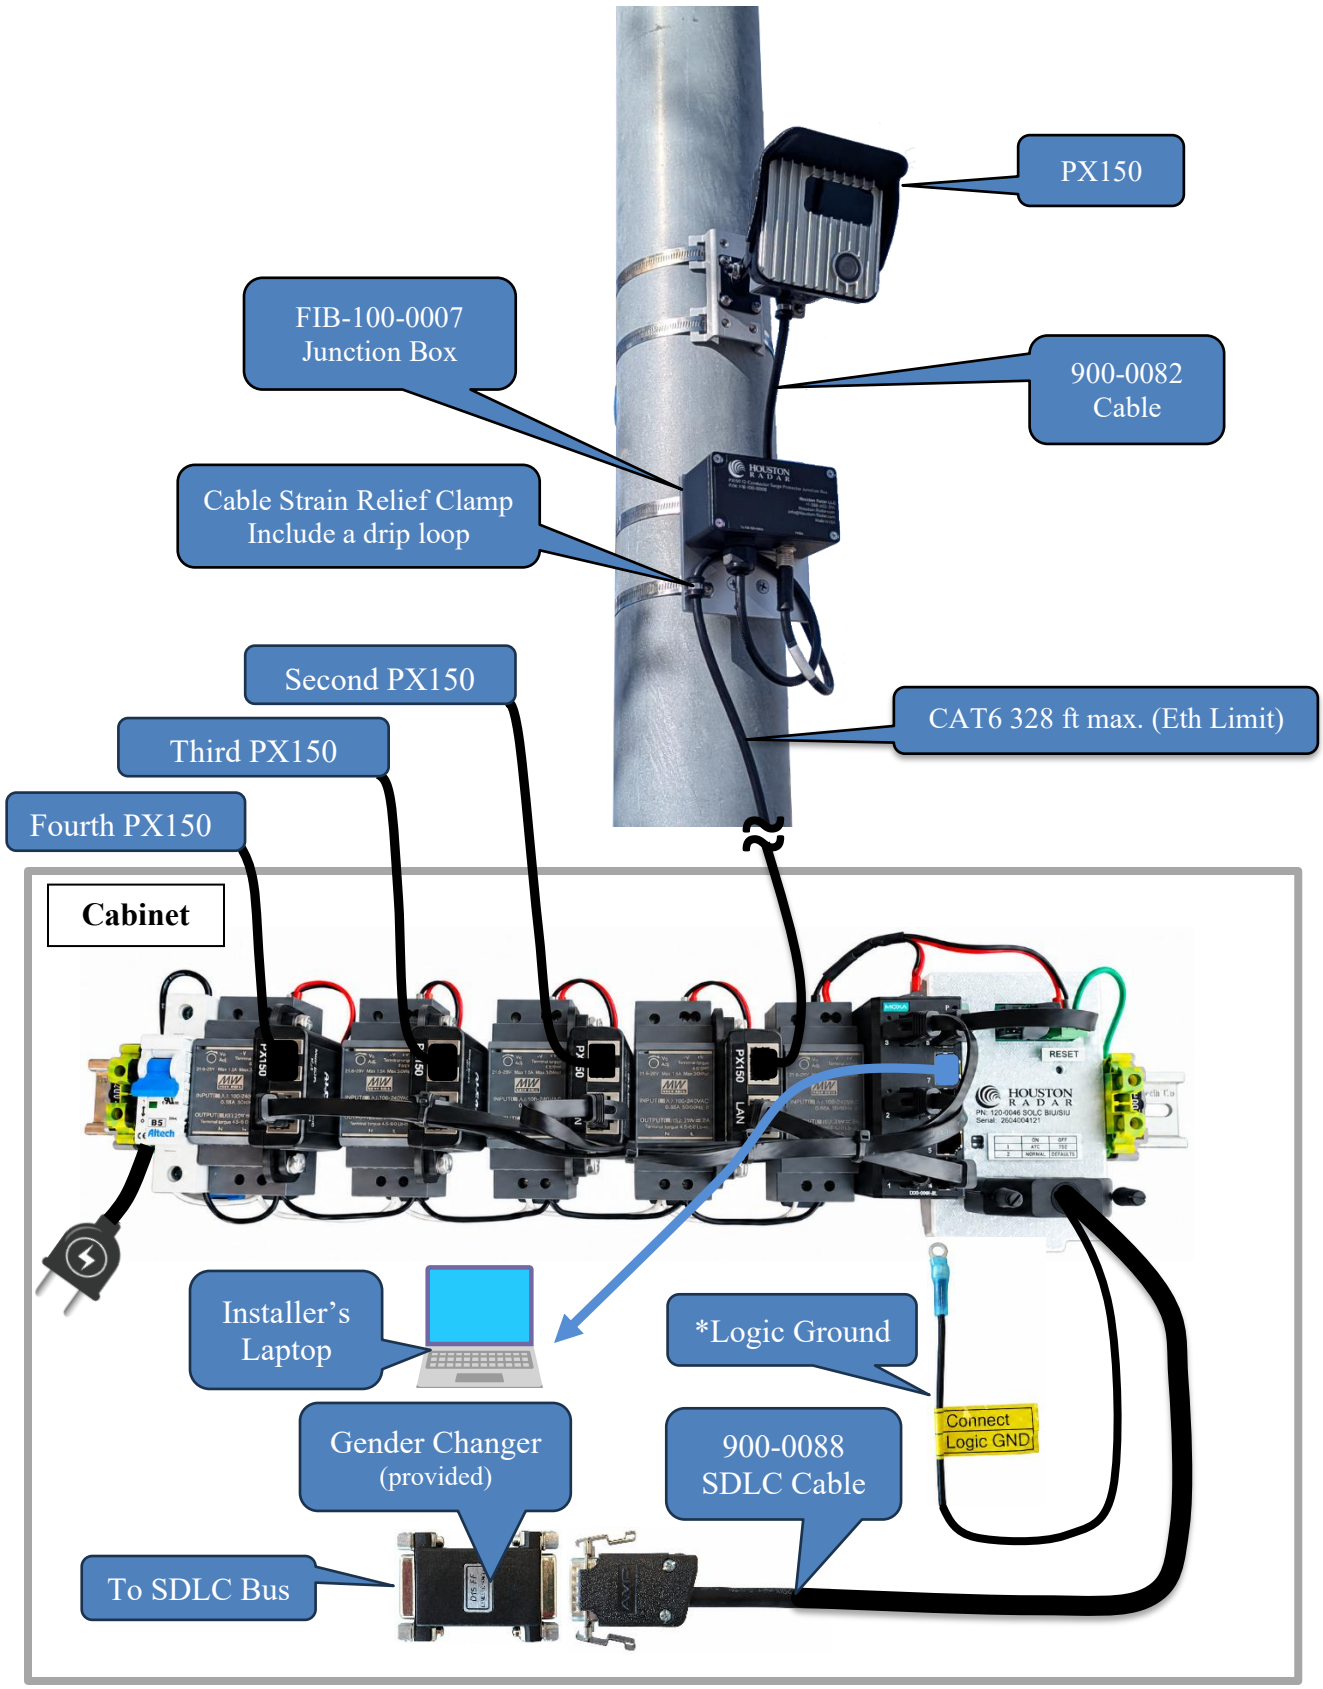

Houston Radar DIN-200-0004 Quick Start

Installation Video Link

https://houston-radar.com/px150-din-200-0002-video

Specifications:
Input voltage (V): 85 – 264 VAC
Working temperature: - 25 to +55 °C
Dimensions: 20 ¾" (width) x 5" (height) x 4" (depth)

***Logic Ground - The SDLC cable's (Part Number 900-0088) Logic Ground conductor should be connected to the cabinet's designated DC logic-ground point, following the cabinet manufacturer's instructions and local agency standards. Do not connect Logic Ground to chassis/equipment ground or AC neutral.**

WARNING—Hazardous voltage. De-energize and lock out the AC supply, then verify absence of voltage before installing or wiring DIN-200-0004. Installation must be performed by qualified personnel in accordance with applicable electrical codes.